



Comp_BlackIceMx_MX1

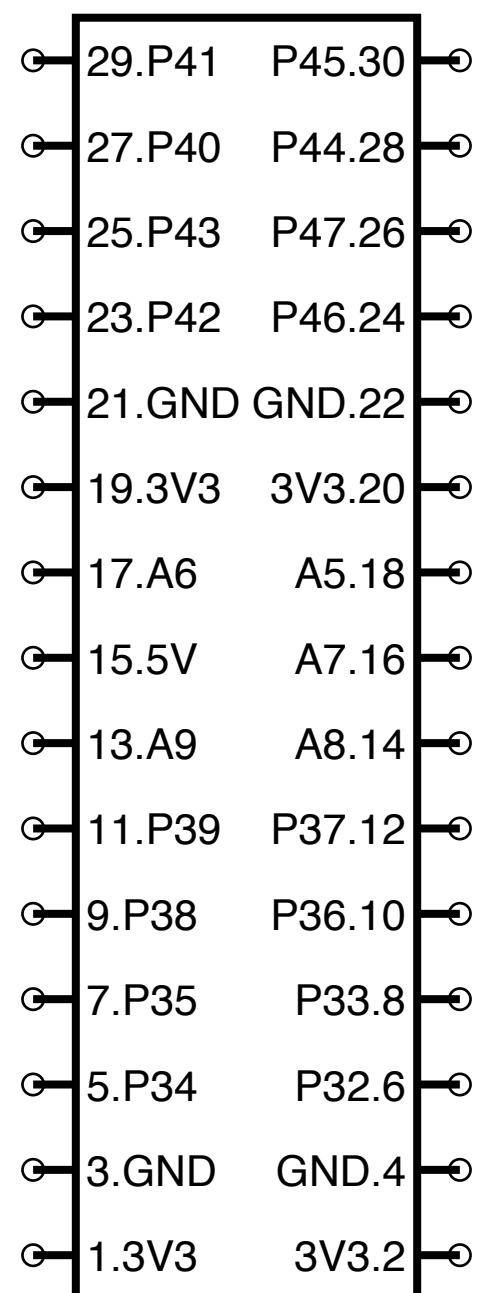

Comp_BlackIceMx_MX2

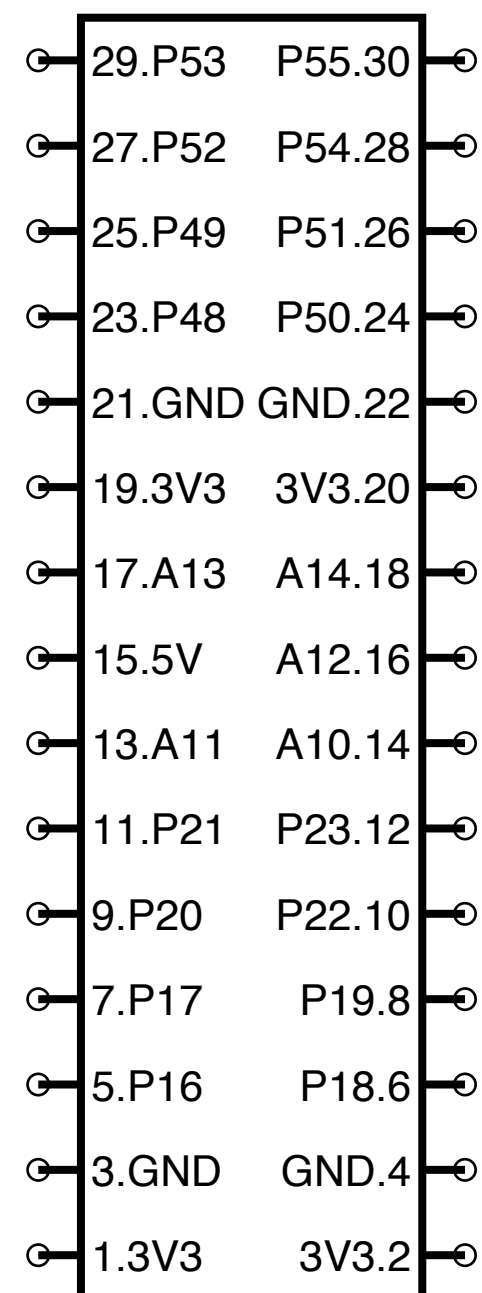

Comp_BlackIceMx_MX3

iCircuit will number subcircuits from 1 to N and show as if a DIL chip.
 Therefore pin numbers are defined as an element of a pin name.
 To make the pin number appear closest to the pin:
 the left, uneven numbers start with pin number and
 the right, even numbers end with that pin number.

- AN0-AN15 are named A0-A16 so that text wil not overlap when iCircuit lays it out